



PRODUCT SPECIFICATION SHEET

COMBINED OVERFILL AND BUND ALARM FOR TANKS

BRAND:



TOP SPEC:

Battery or Mains Powered

PAGE

1/1

Product Description

Atkinson Combined Bund & Overfill Tank Alarm

Battery or mains powered versions available.

Simple operating principle; Float switches are suspended inside the top of the tank and inside the bund. These are factory attached to the alarm with cables of 2m in length.

Once the level of fluid in the tank or bund raises the float, an audible alarm will sound.



Main Features

- Be alerted in the event of a change in fuel level or a breached bund
- Battery or mains powered versions available
- Volt free contacts available
- Extendable probe cables
- Simple to use

Additional Information

Part Number


Combined Overfill and Bund Tank Alarm 230v AC Mains

TA1080

Combined Overfill and Bund Tank Alarm 9v DC Battery

TA1055

TANK ALARMS - INSTALLATION

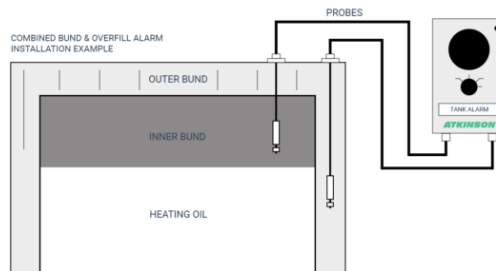

BUND ALARM - ONE PROBE FITTED
 OVERFILL ALARM - ONE PROBE FITTED
 BUND & OVERFILL ALARM - TWO PROBES FITTED
AS DEMONSTRATED IN DIAGRAM ABOVE

NEED MORE INFORMATION?

○ 01373 822220

○ sales@atkinsonequipment.com

○ www.atkinsonequipment.com